



Electrical Specification

ITEMS	SPEC	UNIT
Center Frequency [fo]	3750.0	MHz
Bandwidth [BW]	fo ±80.0 [3670.0~3830.0]	MHz
Insertion Loss in BW	2.2	dB max
Ripple in BW	0.7	dB max
Return Loss in BW	18.0	dB min
Attenuation <input type="checkbox"/> Absolute Value <input checked="" type="checkbox"/> Relative Value	50dB min. @ fo ± 310.0 [3440 & 4060]	MHz
	dB min. @ fo ± [&]	MHz
	dB min. @ fo ± [&]	MHz
	dB min. @ fo ± [&]	MHz
Group Delay Variation		ns max
Input Power	2.0	W max.
In/Out Impedance	50 Ω	
Operation Temperature Range	-40°C to +85°C	

Mechanical Specification

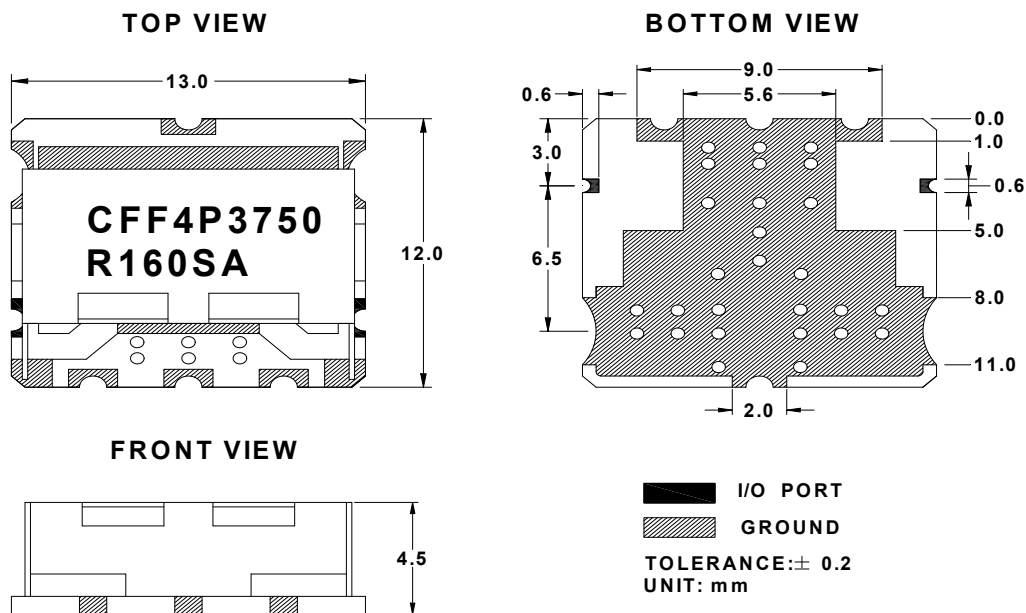



Plot Data

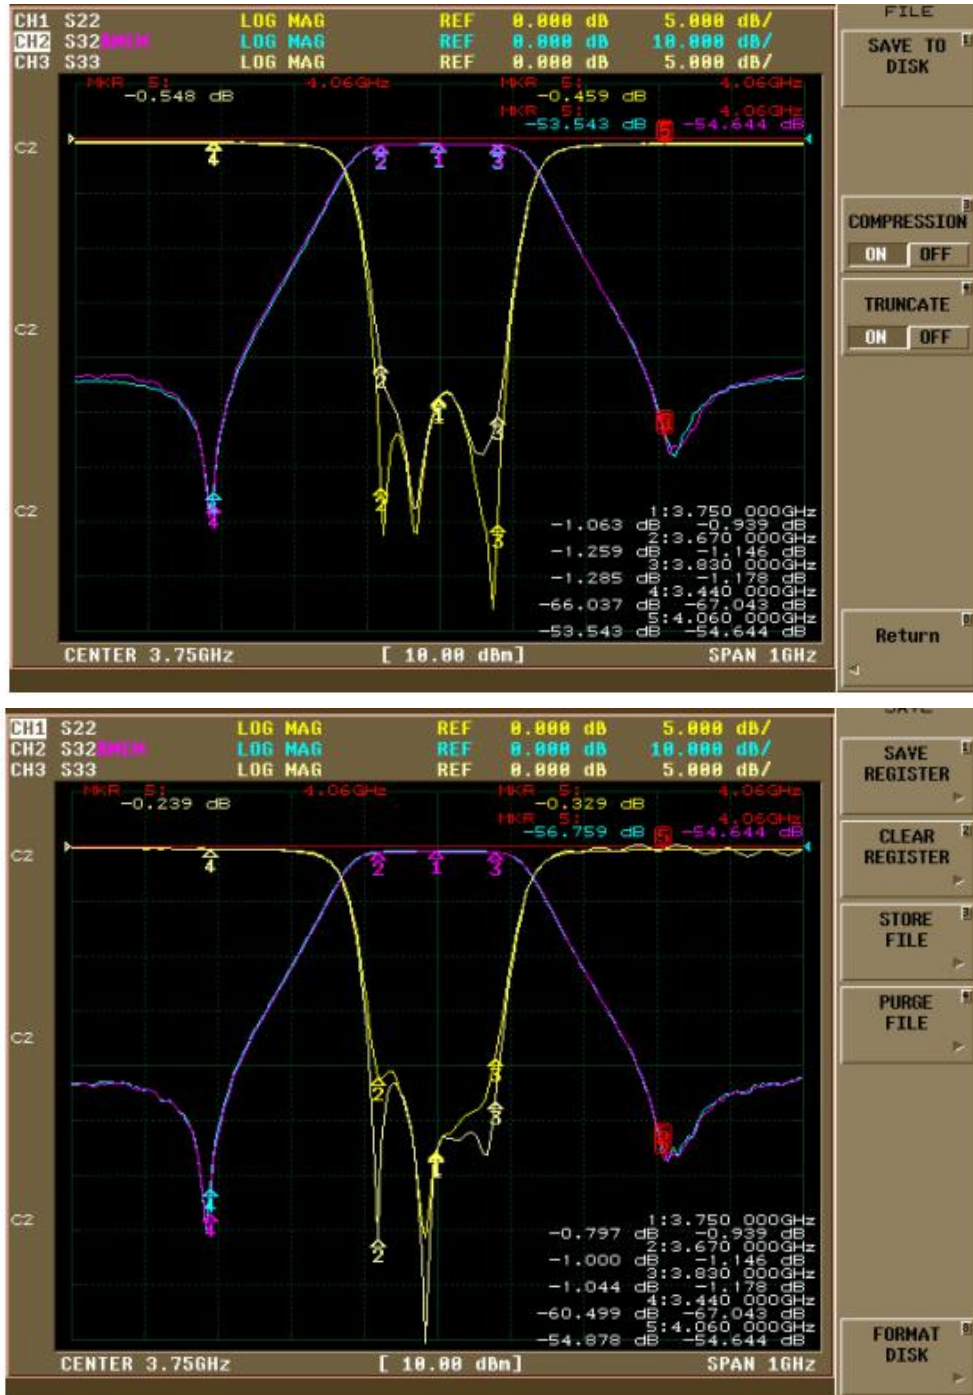




Recommended PC Board Pattern

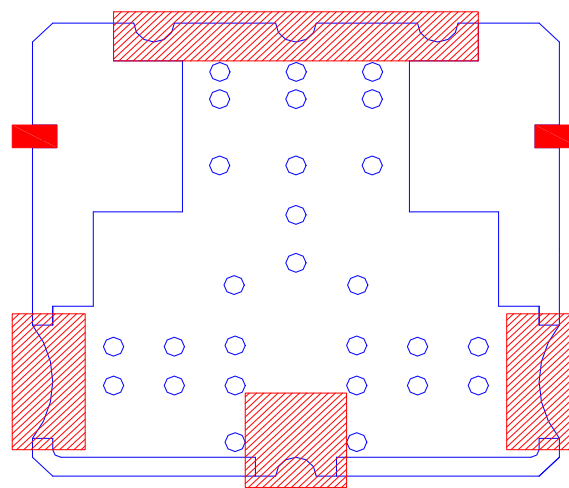

-  I/O PORT SOLDERING POINT
-  GROUND SOLDERING POINT

 Soldering Condition

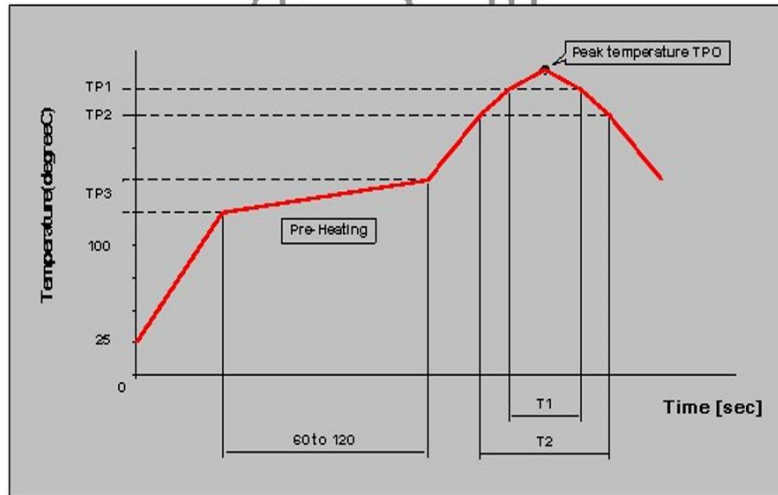

Measuring point of temperature : IN-OUT Terminals of The Device

Reflow Soldering : Both Convection and Infrared Rays, Hot Air and Hot Plate

Reflow standard condition	TP0 (°C)	TP1 (°C)	T1 (s)	TP2 (°C)	T2 (s)	TP3 (°C)
Sn-3Ag-0.5 solder	245±/5	220	30 to 60	—	—	150 to 180
Test condition of reflow heat resistance	260+5/-0	240	20	220	70	150 to 180