



Electrical Specification

ITEMS	SPEC	UNIT
Center Frequency [fo]	957.0	MHz
Bandwidth [BW]	fo ±3.5 [953.5~960.5]	MHz
Insertion Loss in BW	3.0	dB max
Ripple in BW	0.5	dB max
Return Loss in BW	20.0	dB min
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	30.0 dB min. @ fo ± 70.0 [887.0 & 1027.0 ]	MHz
	dB min. @ fo ± [ & ]	MHz
	dB min. @ fo ± [ & ]	MHz
	dB min. @ fo ± [ & ]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temperature Range	-40°C to +85°C	


Mechanical Specification



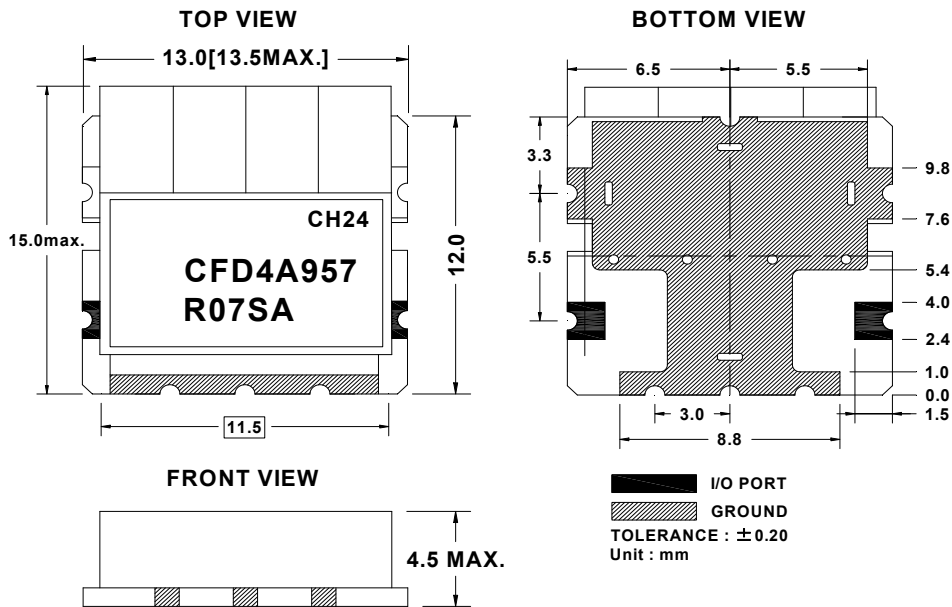
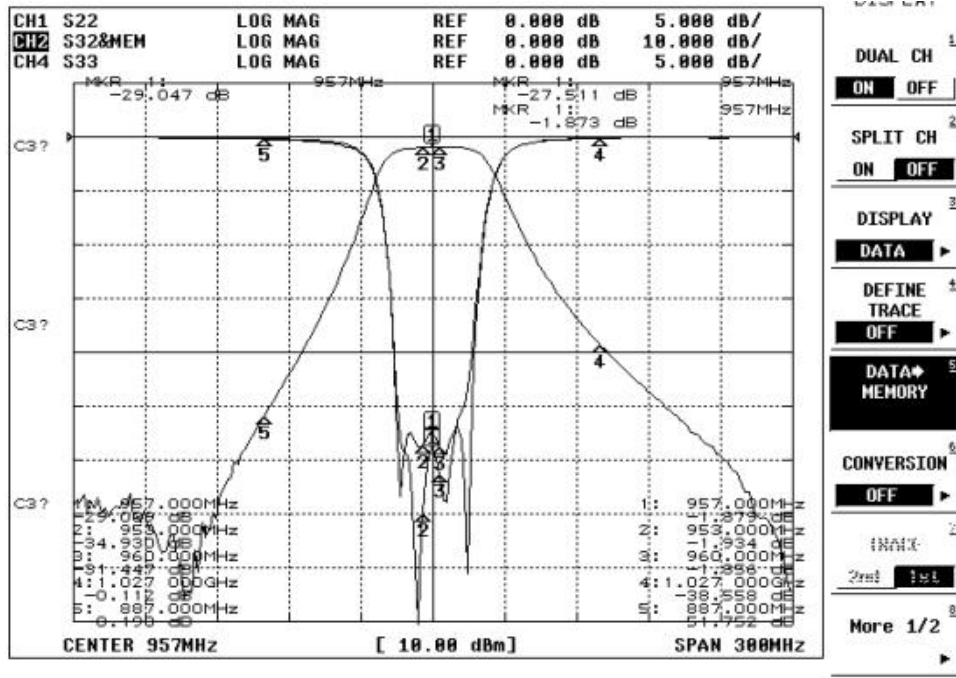
## Plot Data

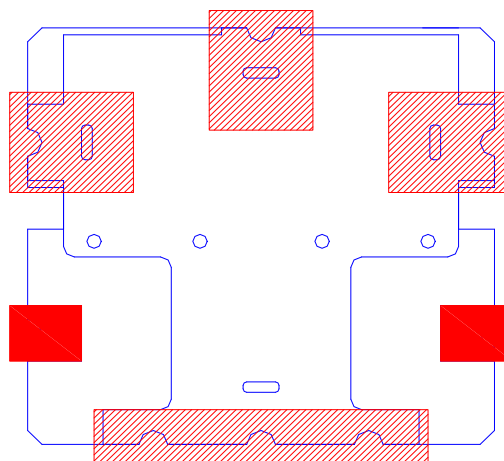


## Recommended PC Board Pattern



-  I/O PORT SOLDERING POINT
-  GROUND SOLDERING POINT

**Soldering Condition**

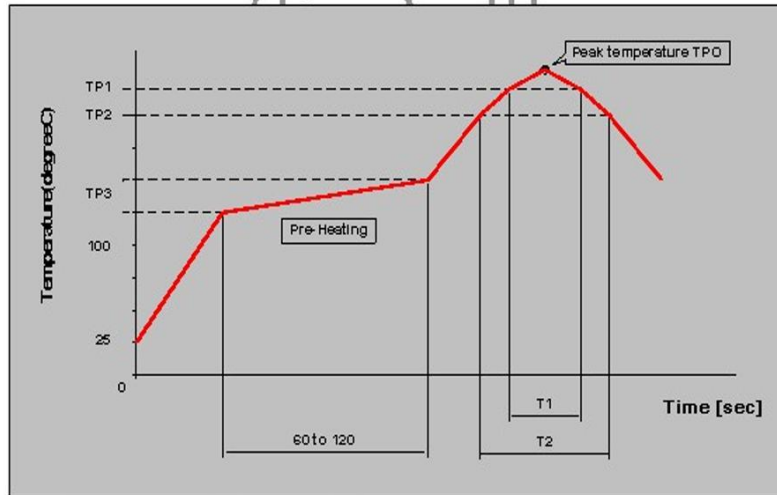

Measuring point of temperature : IN-OUT Terminals of The Device

Reflow Soldering : Both Convection and Infrared Rays, Hot Air and Hot Plate

Reflow standard condition	TP0 (°C)	TP1 (°C)	T1 (s)	TP2 (°C)	T2 (s)	TP3 (°C)
Sn-3Ag-0.5 solder	245±5	220	30 to 60	—	—	150 to 180
Test condition of reflow heat resistance	260±5/0	240	20	220	70	150 to 180